HYT-5040A/ 1 - 2 3 4 5			
1	**B** (311HN)	**J** (重机款JUKI)	**H**(汉羽款HONYU)
2	**H** (焊缝装置Weld Base)	**P** (叠缝装置Seam Base)	**/** (默认同时包含焊缝与叠缝装置 Weld and seam base both included)
3	**D** (点位装置Mark Positioning Device)	**S** (视觉装置Visual Recognition System)	
4	**E/T/C**		
5	**R/J/Z**		

* 1：缝纫机选配（Optional sewing machine head）　2345: 功能选配（Optional functions or devices）

汉羽科技（广东）有限公司
Honyu Technology (G.D) Co., Ltd.
地址：广东省中山市小榄大道中144号汉羽商厦　Email: eddie@honyuco.com
Address: Honyu Building, No.144, Middle Xiaolan Road, Zhongshan City, Guangdong China　Website: www.e-honyu.com（中）　www.honyu-tech.com

Honyu Products



Multi-Function Elastic Waistband Joining Machine

多工艺橡筋机

HYT-5040A

设备介绍 INTRODUTION

本设备是首台能够实现“ 叠缝 ”、“ 平缝 ”、“ 焊接 ” 三种不同工艺的全自动橡筋机，其性能稳定，工作效率高，适用于市面上全部的针织内裤橡筋，能大大降低设备投入成本。

This equipment is the first one that can combine three different process of “overlap seam”, “flat seam” and “weld“ into one single machine. It can perform high efficiency and ensure stable quality, which is applicable to all the elastic waistbands of knitted underwear and can greatly reduce the invest cost of machine.

应用范围 APPLICATION

适用于白筋和明筋。

Applicable to wrapped elastic and unwrapped elastic.

12-15条/分钟 *pieces/min*




白筋
Wrapped elastic

7-10条/分钟 *pieces/min*



明筋
Unwrapped elastic


选配功能 OPTIONAL

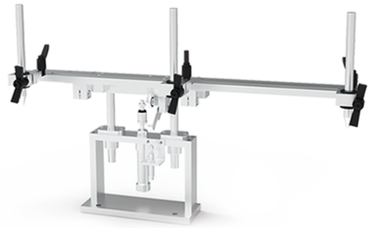


点位装置（D）
Mark positioning device（D）



视觉系统装置（S）
Visual recognition system（S）

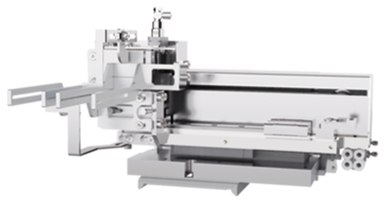

焊缝部件（H）
Weld base（H）

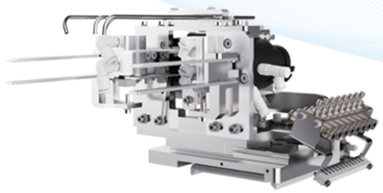

叠缝部件（P）
Seam base（P）

功能特色 FEATURES

- 可选择叠缝、平缝、焊接生产。
  Applicable to overlap seam, flat seam and weld process.



叠缝
Overlap seam

平缝
Flat seam

焊接
Weld

- 生产废料少且稳定。
  Less waste production.



人工废料
Manual



机器废料
Machine

- 多位收料器。
  Multiple stacking device.
- 不良品自动排除。
  Automatic remove defective product.
- 断线报警。
  Thread breaking detection.

产品规格 SPECIFICATION

橡筋宽度	Width	15-65mm（BAS 311HN-03S）
橡筋最小周长	Minimum girth	240mm
电压	Voltage	220-240V
气压	Air pressure	0.5-0.6Mpa
功率	Power	2500W
尺寸	Size	1300(L)*1200(W)*1700(H)mm
缝纫速度	Speed	建议 Recommend 2000-2300rpm
重量	Weight	380kg
分贝	Decibel	80dB

*产品的规格与外观，若由于改良有变更，恕不另行通知。
Specifications and appearance of the products are subject to change for improvement without further notice.