Honyu Products



Semi-auto Double sided bonding tape machine

双面贴标机

HYT-5043A

汉羽科技（广东）有限公司

Honyu Technology (G.D) Co., Ltd.

地址：广东省中山市小榄大道中144号汉羽商厦 Email: eddie@honyuco.com

Address: Honyu Building, No.144, Middle Xiaolan Road, Zhongshan City, Guangdong China Website: www.e-honyu.com（中） www.honyu-tech.com

设备介绍 INTRODUTION

本设备是用于橡筋带成环，并在能橡筋的底部、面部加固一道商标带的半自动设备，只需人手放标带和橡筋，自动完成翻折和压烫，兼顾生产效率和成本

This equipment is a semi-automatic device used for forming elastic bands into rings and reinforcing a trademark tape on the bottom and top of the elastic. Only manual placement of the trademark tape and elastic is needed, and it automatically completes folding and ironing, taking into account production efficiency and cost.

应用范围 APPLICATION

适用于橡筋带烫压商标产品

Applicable to wrapped elastic and unwrapped elastic.





标带宽度	Bonding tab width	15-25mm
橡筋宽度	Elastic width	15-45mm

功能特色 COMPARISON

- 镭射灯辅助定位
  Laser light for auxiliary positioning
- 可配备辅助取标带装置
  Can be equipped with an auxiliary label - taking device

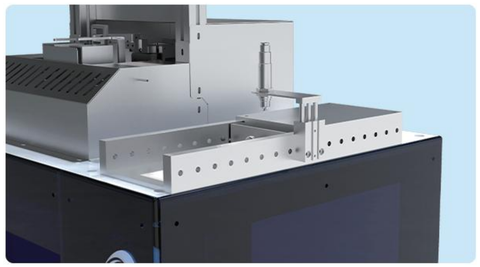

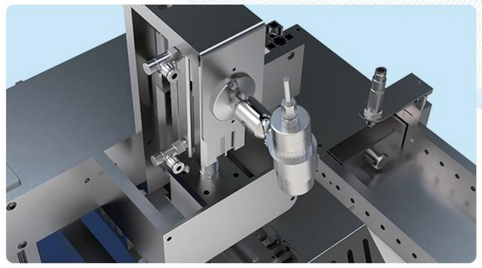

人机对比 FEATURES

人工 Manual	双面标带机 Machine
	

工序流程：
Process flow:

把橡筋焊接成环
Weld the elastic into a ring

↓

人工烫标
Manual ironing

效率与工人技能熟练度有关
Output highly relates to worker skills

单头压标
Single - head ironing

可一人多机生产
One worker can manage multiple machines

设备效率与橡筋厚度有关（导热性）
The efficiency of the equipment is related to the thickness of the elastic wasitband (thermal conductivity)

产品规格 SPECIFICATION

标带宽度	Width	15-25mm
橡筋宽度	Width	15-45mm
橡筋最小周长	Minimum girth	200mm
电压	Voltage	220V 50/60Hz
功率	Power	200W
尺寸	Size	781(L)*510(W)*1205(H)mm
重量	Weight	50kg
分贝	Decibel	50dB

*产品的规格与外观，若由于改良有变更，恕不另行通知。
Specifications and appearance of the products are subject to change for improvement without further notice.